


# YIFAN

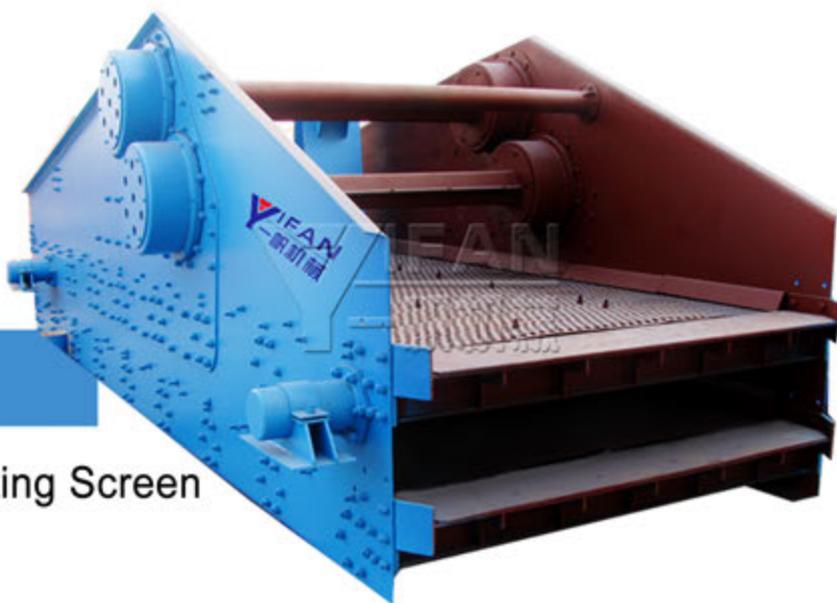

## ZK 系列直线振动筛

## ZK Series Straight-line Vibrating Screen

Leading crushing and screening equipment manufacturer in China

中国领先的破碎筛分设备制造商

郑州一帆机械设备有限公司(由山德技术(北京)有限公司控股),是中国知名的破碎筛分设备制造商。我们为客户提供全系列破碎筛分设备,包括 液压圆锥破碎机、颚式破碎机、反击式破碎机、立式冲击破碎机(制砂机)、移动式破碎站和振动筛,我们不仅为客户提供高性价比的产品,还提供一流的服务支持及解决方案。



# YIFAN

郑州一帆机械设备有限公司

ZHENGZHOU YIFAN MACHINERY CO.,LTD

服务热线: 400-665-6688 0371-64627000 64989888

网址: [www.yfmac.com](http://www.yfmac.com)

地址: 中国郑州荥阳开发区郑源路

## ZK Series Straight-line Vibrating Screen



ZK系列直线振动筛是吸收了德国技术制造的高效振动筛,广泛应用于煤炭、冶金、电力、建材、轻工等行业,对中、细粒级物料进行干、湿式分级或脱水、脱泥、脱介等。

ZK Series Straight-line Vibrating Screen absorbs Germany technology. With the world advanced technology and unique eccentric structure, it is used in coal, metallurgy, electric power, building materials etc. and suitable for dewater, demud, demedium as well as dry and wet classification to medium and fine materials.

### 技术参数 Technical Data

型号 Model	筛面 Screen Surface		筛网结构 Structure	给料粒度 Max Feeding Size(mm)	处理能力 Capacity (t/h)	电机功率 Motor Power (kw)	重量 Weight (kg)
	面积 Deck Size(m <sup>2</sup> )	筛孔尺寸 Mesh(mm)					
ZK1022	2.25	0.25-50		<250	4.5-90	3×2	2215
ZK1230	3.6	0.25-50		<250	7.2-115	4×2	2662
ZK1237	4.5	0.25-50		<250	9.0-180	5.5×2	3118
ZK1437	5.25	0.25-50		≤250	12.0-250	5.5×2	3388
ZK1445	6.3	0.25-50		≤250	12.6-252	7.5×2	3806
ZK1637	6	0.25-50		<250	12.0-240	5.5×2	3552
ZK1645	7.2	0.25-50		≤250	16.2-324	7.5×2	4235
ZK1837	6.75	0.25-50		<250	14.4-270	7.5×2	3776
ZK1845	8.1	0.25-50		≤250	16.2-324	11×2	4842
ZK1852	9.45	0.25-50		<250	18.9-378	11×2	5900
ZK2045	9	0.25-50		<250	16.2-324	11×2	5969
ZK2052	10.5	0.25-50		<250	21.0-420	11×2	6472
ZK2060	12	0.25-50		<250	90-270	15×2	8074
ZK2445	10.8	0.25-50		<250	21.6-432	15×2	7439
ZK2452	12.6	0.25-50		<250	25.2-504	15×2	8216
ZK2460	14.4	0.25-50		<250	28.8-576	15×2	8522
ZK3045	13.5	0.25-50		<250	27.0-540	15×2	9859
ZK3052	15.75	0.25-50		<250	31.4-628	22×2	9958
ZK3060	18	0.25-50		<250	36-720	22×2	9366
ZK3645	16.2	0.25-50		<250	37.8-756	22×2	12289
ZK3652	18.9	0.25-50		<250	43.2-846	22×2	13409
ZK3660	21.6	0.25-50	编织、条缝、冲压、橡胶、聚氨酯筛网	<250	43.2-846	22×2	14390
ZK3675	27	0.25-50	Punched.Polyurethane.Stripped and Seanmed	<250	54.0-1080	30×2	17100
2ZK1022	2.25	0.25-50		<250	4.5-90	4×2	3018
2ZK1230	3.6	0.25-50		<250	7.2-144	5.5×2	3740
2ZK1237	4.5	0.25-50		<250	9.0-180	7.5×2	4460
2ZK1437	5.25	0.25-50		<250	12.0-250	7.5×2	5042
2ZK1445	6.3	0.25-50		<250	12.6-252	15×2	6883
2ZK1637	6	0.25-50		<250	12.0-240	15×2	6919
2ZK1645	7.32	0.25-50		<250	14.4-280	15×2	8654
2ZK1837	6.75	0.25-50		<250	14.4-270	15×2	7951
2ZK1845	8.1	0.25-50		<250	16.2-324	15×2	8116
2ZK1852	9.45	0.25-50		<250	18.9-378	15×2	9061
2ZK2045	9	0.25-50		<250	16.2-324	15×2	9133
2ZK2052	10.5	0.25-50		<250	21.0-420	22×2	10128
2ZK2060	12	0.25-50		<250	24.0-480	22×2	10875
2ZK2445	10.8	0.25-50		<250	21.6-432	22×2	11008
2ZK2452	12.6	0.25-50		<250	25.2-504	22×2	12757
2ZK2460	14.4	0.25-50		<250	28.8-576	22×2	13560
2ZK3045	13.5	0.25-50		<250	27.0-540	30×2	15472
2ZK3052	15.75	0.25-50		<250	31.4-628	37×2	16942
2ZK3060	18	0.25-50		<250	36-720	30×2	17900
2ZK3645	16.2	0.25-50		<250	37.8-756	45×2	21042
2ZK3652	18.9	0.25-50		<250	43.2-846	45×2	24040
2ZK3660	21.6	0.25-50		<250	43.2-846	45×2	25400

**注:** 表内所列处理能力是对松散密度为1.6t/m<sup>3</sup>的石灰石进行干式分级时的数据。所列处理能力仅供参考。具体值根据现场情况与研发部商定。

**Note:** The processing capacity listed in the table is based on dry classification of limestone, which bulk density is 1.6t/m<sup>3</sup>. The listed capacity is only for reference. The actual data need to be fixed by tech department according to worksite situation.



总公司：山德技术（北京）有限公司  
SHANDE TECHNOLOGY (BEIJING) CO., LTD.

郑州一帆机械设备有限公司  
地址：中国郑州市荥阳开发区郑源路  
邮编：450100  
电话：0371-6462 7000 6462 6911  
传真：0371-6460 6468  
免费咨询电话：400-665-6688  
网址：www.yfmac.com  
E-mail: yifan@yfmac.com

ZHENGZHOU YIFAN MACHINERY CO., LTD.  
Add:Zhengyuan Rd,Xingyang,Zhengzhou Henan 450100,China  
Tel:+86 371 64628852  
Fax:+86 371 64628872  
Website: www.yfcrusher.com  
E-mail: sales@yfmac.com

我们的产品在不断更新和改进中，一帆保留在未事先告知的情况下更改参数及设计的权利。

Our products are constantly updated and improved. YIFAN reserves the right to modify parameters and design without notice.

照片中产品外观颜色与实际机型存在差异，颜色标准以实物为准。

In the photo products' color and appearance might have differences from the actual models, the color need to be subject to the real object.

本手册中的配置不一定是出厂标准配置，购买时请详细咨询我们。

The configuration in this manual are not necessarily the Ex-factory standard, please consult with us before purchasing.